


# Aluminium column SAL-6

diameter Ø120mm at the base plate

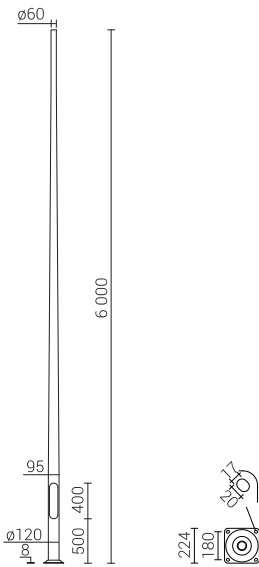


**Anodising:** 10 colours, each with possibility of chemical brightening

**Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

**Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

**Extension arm type:** According to resistance calculations

**Packing:** sleeve material



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
<b>42207</b>	SAL-6	6m	4mm	21,1kg	0,134m <sup>3</sup>	B-50 / Z-50	311150 / 311205	4006

SAL-6		Acceptable windage of single luminaire [m <sup>2</sup> ] for Cx=1			
Code 42207		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Type of extension arm	Permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.I	II zone, II Field category	III zone, II Field category up to 755m by s.I
-	20	0,25	0,20	0,13	0,10
WA-1	10	0,17	0,12	0,06	x
WA-4	10	0,07	x	x	x
WA-5/1	10	0,06	x	x	x
WA-14/1	10	0,08	x	x	x
WR-4/1/0,6/15	-	ISKRA LED			
WR-4/2/0,6/15	-	ISKRA LED			x
WR-4/1/0,5/5	-	ISKRA LED			
WR-4/2/0,5/5	-	ISKRA LED			x
WR-4/1/0,6/15 ZP	-	ISKRA LED			
WR-4/2/0,6/15 ZP	-	ISKRA LED			x
WR-4/1/0,5/5 ZP	-	ISKRA LED			
WR-4/2/0,5/5 ZP	-	ISKRA LED			x
WN-1	15	0,21	0,16	0,09	0,05
WN-2	8	0,10	0,07	0,04	x

