

ISKRA LED P ALFA PROG



Application: pedestrian crossings

Assembly: directly on the pole wit Ø60x80

Ingress protection: IP 66

Material: anodised aluminium alloy

Colour: inox / black

Optical system: PMMA optics

Number of LEDs: 12

Operating temperature range: from -40°C to +55°C

Expected useful lifetime: L90F10 – 50 000 h, L80F20 – 100 000 h

CRI: >70 for 5000K, 4000K; >80 for 3500K


Corrective factor S/P: 1,8 for 5000K; 1,45 for 3500K; 1,55 for 4000K

Input voltage frequency: 50 / 60Hz

Power factor: ≥0.95


Inrush current: : 22A / 290µs

Luminaire ISKRA LED P ALFA PROG has the possibility to connect to an external control system via DALI interface (optionally via analog signal 1- 10V).



Code	Symbol	LED power	Luminaire Power consumption	LED forward current	Colour temperature (CCT)	LEDs luminous flux ²⁾	Luminaire luminous flux ²⁾	Luminous efficacy	Unit volume	Luminaire net weight
21330132/3/... ¹⁾	ISKRA LED P 36 ALFA PROG	36W	40W	1000mA	3500K	4 750lm	4400lm	110lm/W	0,01m ³	2,5kg
21330132/4/... ¹⁾	ISKRA LED P 36 ALFA PROG	36W	40W	1000mA	4000K	5 250lm	4700lm	118lm/W	0,01m ³	2,5kg
21330132/6/... ¹⁾	ISKRA LED P 36 ALFA PROG	36W	40W	1000mA	5000K	5 450lm	4900lm	123lm/W	0,01m ³	2,5kg

ISKRA LED P ALFA PROG
na przejścia dla pieszych dla dróg z ruchem prawostronnym



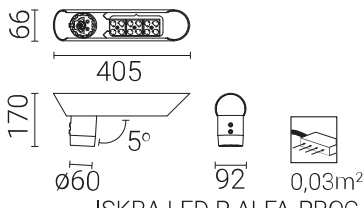


1) Symbol of chosen optical system eg. 21330132/6/L is ISKRA LED P 36 ALFA PROG 5000K with optical system for roads with left-hand side traffic

2) tolerance +/- 3% due to LEDs accuracy

Directive: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE, 2009/125/EC

ISKRA LED P ALFA PROG
na przejścia dla pieszych dla dróg z ruchem lewostronnym

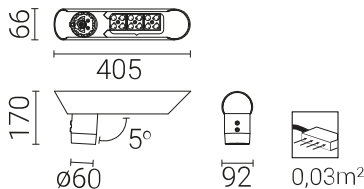

Acceptable quantity of luminaires ISKRA LED P ALFA PROG on one circuit, protected by:

Overcurrent switches MCB type B or C

Luminaire	Typ	2A	4A	6A	10A	16A	20A	25A
ISKRA LED PROG	B	2	4	8	12	20	25	31
	C	2	8	12	20	34	41	52

Fuse – type gG and GL

Luminaire	2A	4A	6A	10A	16A	20A	25A
ISKRA LED PROG	4	9	14	25	39	50	62