

Aluminium column MAL-13 WŁ 2/2,5/5,5/5

diameter $\varnothing 225\text{mm}$ at the base plate




Anodising: 10 colours, each with possibility of chemical brightening

Finish: grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

Luminaire mounting: directly on the column, luminaires with mounting $\varnothing 60\text{ mm}$ with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

Extension arm type: According to resistance calculations

Packing: sleeve material

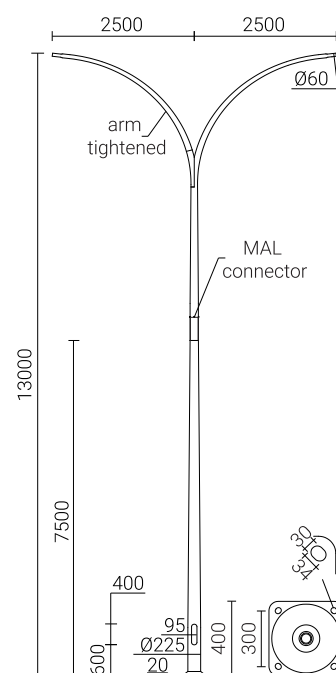

Aluminium column MAL-13 WŁ 2/2,5/5,5/5

diameter Ø225mm at the base plate



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42512	MAL-13 WŁ 2/2,5/5,5/5	13m	5mm	116,6kg	1,21m ³	B-80 / Z-80	311180 / 311208	4012

MAL-13 WŁ 2/2,5/5,5/5	Acceptable windage of single luminaire [m ²] for Cx=0,7			
code 42512	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I
15	0,19	0,13	x	x