

OZ



Assembly: on columns, extension arms, aluminium and steel wall brackets with spigot ending $\varnothing 60$ mm, 70 mm deep and on poles type S and SP with special adaption for this luminaire

Ingress protection: IP 44

Material: Polyamide with fibre glass

Colour: black

Input voltage: 230V AC


Input voltage frequency: 50Hz

Sposób montażu: upwards only

Unit volume: 0,01m²



Code	Symbol	Diameter of lamp diffuser	Power	Type of diffuser	Light source type	Windage	Net weight
211415	OZ 400	180mm	23W	Sphere 400, Atlanta 400, Klio 400	Compact fluorescent lamp E-27	0,13m ²	0,35kg

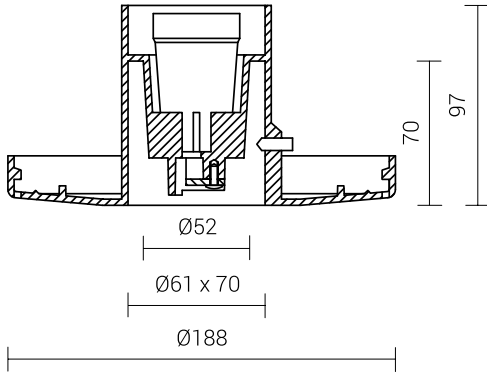

Directive: 2014/35/UE (Official Journal of the UE L 96/357 29.03.2014), 2014/30/UE (Official Journal of the UE L 96/79 29.03.2014), 2011/65/UE, 2009/125/EC