


# Aluminium column SAL-10 WŁ 2/2,5/3,7/5

diameter  $\varnothing 176\text{mm}$  at the base plate

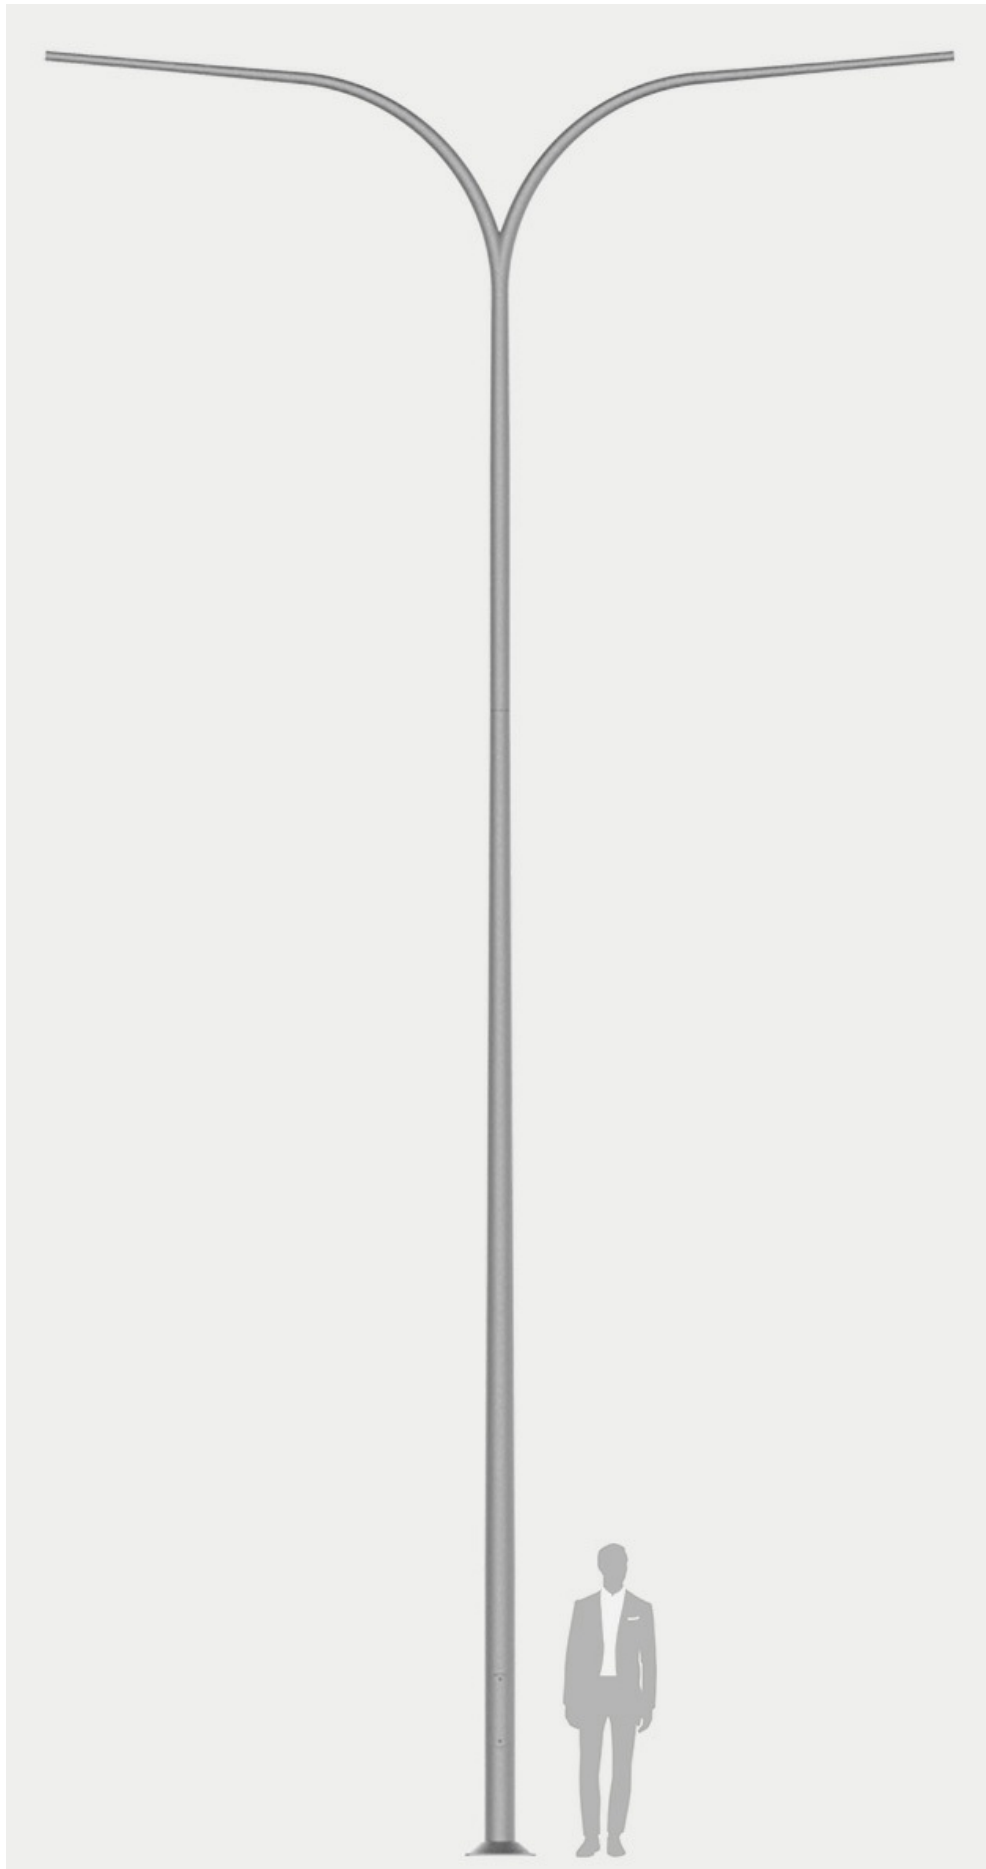


**Anodising:** 10 colours, each with possibility of chemical brightening

**Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

**Luminaire mounting:** directly on the column, luminaires with mounting  $\varnothing 60\text{ mm}$  with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet


**Extension arm type:** According to resistance calculations

**Packing:** sleeve material

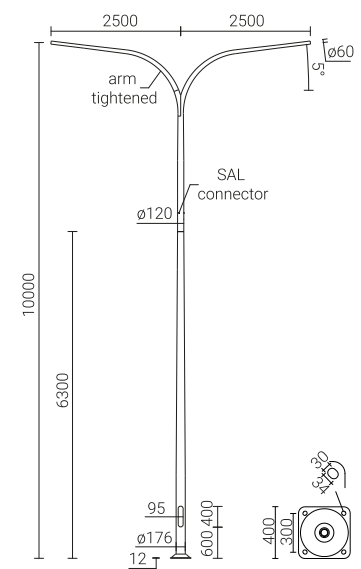

# Aluminium column SAL-10 WŁ 2/2,5/3,7/5

diameter Ø176mm at the base plate



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
<b>42444</b>	SAL-10 WŁ 2/2,5/3,7/5	10m	—	67,4kg	0,99m <sup>3</sup>	B-70 / Z-70	311170 / 311207	4012

SAL-10 WŁ 2/2,5/3,7/5 Acceptable windage of single luminaire [m<sup>2</sup>] for Cx=0,7

code 42444	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I
15	0,16	x	x	x