


Aluminium column SAL-11 P11 OZ

diameter Ø176mm at the base plate

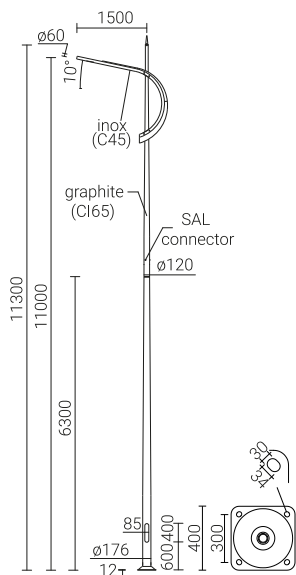

Anodising: 10 colours, each with possibility of chemical brightening

Finish: grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

Luminaire mounting: directly on the column, luminaires with mounting Ø60mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

Extension arm type: According to resistance calculations

Packing: sleeve material

| Code | Symbol | Height of the column | Wall thickness | Net weight | Approximate unit volume | Concrete footing / reinforcement basket type | Concrete footing / reinforcement basket code | Fasteners |
|----------------|---------------|----------------------|----------------|------------|-------------------------|--|--|-----------|
| 42493/C165/C45 | SAL-11 P11 OZ | 11,3m | 5,2mm | 73,3kg | 0,705m ³ | B-70 / Z-70 | 311170 / 311207 | 4012 |

| SAL-11 P11 OZ | Dopuszczalna powierzchnia boczna pojedynczych opraw [m ²] | | | |
|---|---|---|-----------------------------|---|
| | dla Cx=0,7 | | | |
| kod 42493/C165/C45 | Vref. = 22 m/s | Vref. = 24 m/s | Vref. = 26 m/s | Vref. = 28 m/s |
| Dopuszczalna waga pojedynczej oprawy [kg] | I strefa, II kateg. terenu | I i III strefa, II kateg. terenu do 450m n.p.m. | II strefa, II kateg. terenu | III strefa, II kateg. terenu do 755m n.p.m. |
| 15 | 0,45 | 0,26 | 0,07 | x |