

Aluminium column SAL-11 P12 OZ

diameter $\varnothing 176$ mm at the base plate




Anodising: 10 colours, each with possibility of chemical brightening

Finish: grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

Luminaire mounting: directly on the column, luminaires with mounting $\varnothing 60$ mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

Extension arm type: According to resistance calculations

Packing: sleeve material

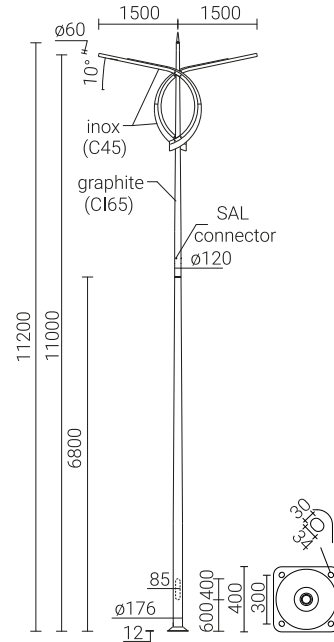

Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42494	SAL-11 P12 OZ Cl65/C45	11,3m	5,2mm	84,6kg	0,858m ³	B-70 / Z-70	311170 / 311207	4012

SAL-11 P12 OZ Acceptable windage of single luminaire [m²] for Cx=0,7

42494/Cl65/C45	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I
15	0,34	0,2	X	X