


# Aluminium column SAL-11 WŁ 2/1,5/4,7/5

diameter  $\varnothing 176\text{mm}$  at the base plate

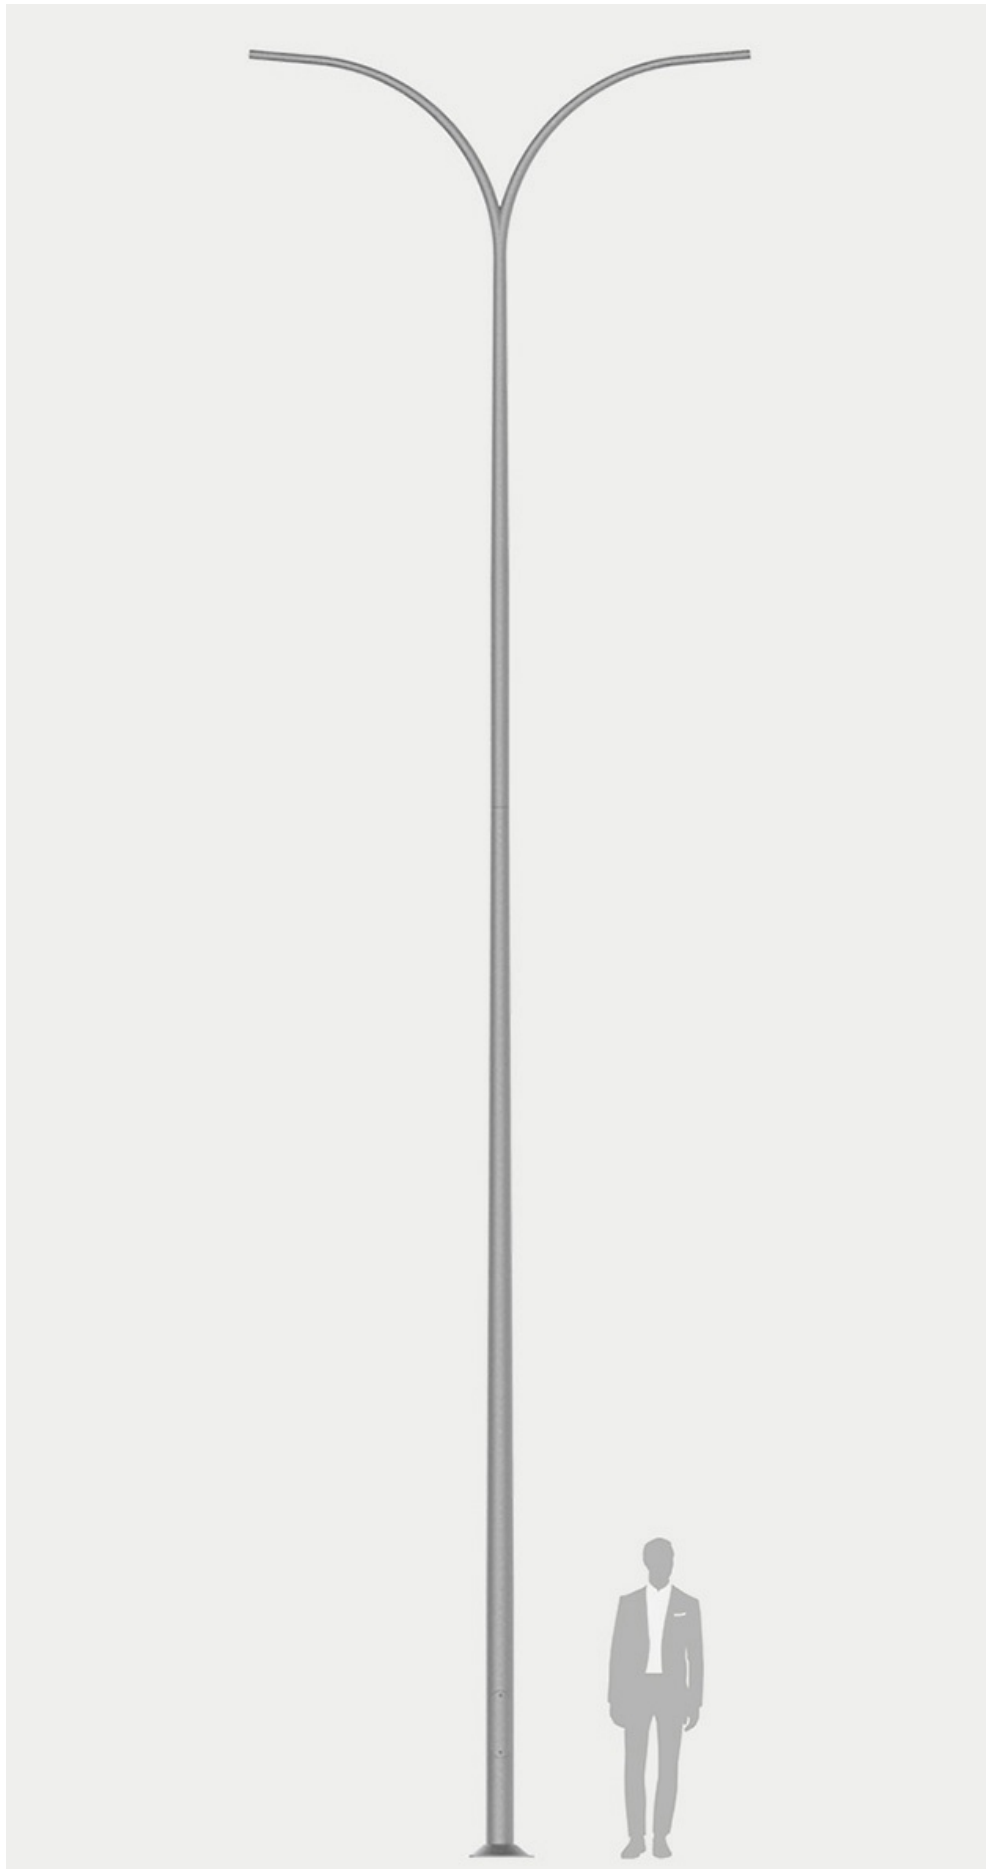


**Anodising:** 10 colours, each with possibility of chemical brightening

**Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

**Luminaire mounting:** directly on the column, luminaires with mounting  $\varnothing 60\text{ mm}$  with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet


**Extension arm type:** According to resistance calculations

**Packing:** sleeve material

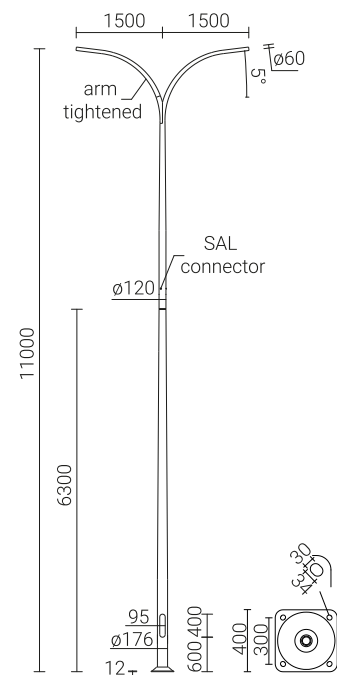

# Aluminium column SAL-11 WŁ 2/1,5/4,7/5

diameter Ø176mm at the base plate



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
<b>42452</b>	SAL-11 WŁ 2/1,5/4,7/5	11m	—	64,2kg	0,88m <sup>3</sup>	B-71 / Z-71	311171 / 311271	4012

SAL-11 WŁ 2/1,5/4,7/5      Acceptable windage of single luminaire [m<sup>2</sup>] for Cx=0,7

code 42452	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I
15	0,13	x	x	x