



Aluminium column SAL-2,5/B60

diameter Ø114mm at the base plate

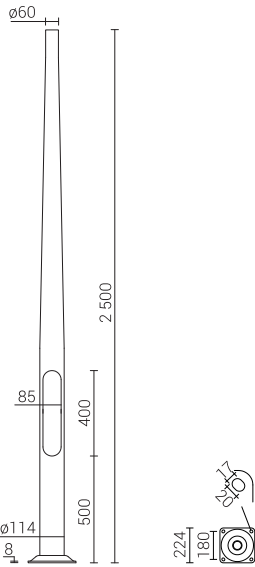

- Anodising:** 10 colours, each with possibility of chemical brightening
- Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)
- Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
- Extension arm type:** According to resistance calculations
- Packing:** sleeve material



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42126	SAL-2,5/B60	2,5m	3mm	7,1kg	0,056m ³	B-50 / Z-50	311150 / 311205	4006

SAL-2,5/B60

Acceptable windage of single luminaire [m²] for Cx=1

Code 42126	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
Type of extension arm	Permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.I	II zone, II Field category	III zone, II Field category up to 755m by s.I
-	20	1,25	1,09	0,91	0,80
WA-1	10	1,01	0,87	0,72	0,63
WA-4	10	0,78	0,66	0,53	0,45
WA-5/1	10	0,38	0,32	0,26	0,22
WA-14/1	10	0,50	0,42	0,34	0,29
WR-4/1/0,5/5	-			ISKRA LED	
WR-4/1/0,5/5 ZP	-			ISKRA LED	
WR-8B/1/0,35/0	-			ISKRA LED	
WR-8B/1/0,35/5	-			ISKRA LED	
WR-8B/1/0,35/10	-			ISKRA LED	

