



# Aluminium column SAL-3/B60

diameter Ø114mm at the base plate

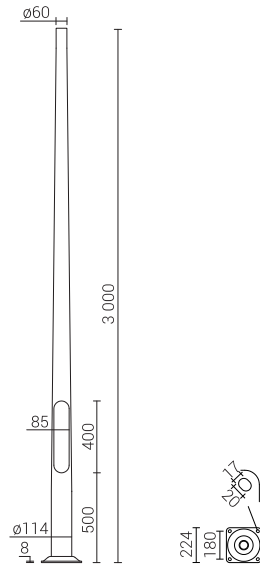

- Anodising:** 10 colours, each with possibility of chemical brightening
- Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)
- Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
- Extension arm type:** According to resistance calculations
- Packing:** sleeve material



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42120	SAL-3/B60	3m	3mm	8,3kg	0,067m <sup>3</sup>	B-50 / Z-50	311150 / 311205	4006

SAL-3/B60

Acceptable windage of single luminaire [m<sup>2</sup>] for Cx=1

Code 42120	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
type of extension arm	permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.l	II zone, II Field category	III zone, II Field category up to 755m by s.l
-	20	0,92	0,80	0,66	0,58
WA-1	10	0,75	0,64	0,52	0,45
WA-4	10	0,57	0,48	0,37	0,30
WA-5/1	10	0,31	0,26	0,20	0,17
WA-14/1	10	0,39	0,33	0,26	0,22
WR-4/1/0,5/5	-			ISKRA LED	
WR-4/1/0,5/5 ZP	-			ISKRA LED	
WR-8B/1/0,35/0	-			ISKRA LED	
WR-8B/1/0,35/5	-			ISKRA LED	
WR-8B/1/0,35/10	-			ISKRA LED	

