


# Aluminium column SAL-4,5/D60

diameter Ø114mm at the base plate

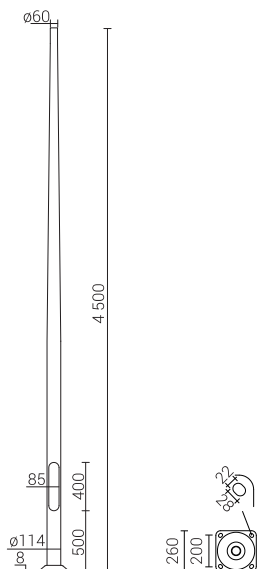

**Anodising:** 10 colours, each with possibility of chemical brightening

**Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

**Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

**Extension arm type:** According to resistance calculations

**Packing:** sleeve material



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42116	SAL-4,5/D60	4,5m	3mm	13,3kg	0,13m <sup>3</sup>	B-51 / Z-51	311151 / 311251	4008

SAL-4,5/D60

Acceptable windage of single luminaire [m<sup>2</sup>] for Cx=1

Code 42116	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
Type of extension arm	Permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.I	II zone, II Field category	III zone, II Field category up to 755m by s.I
-	20	0,39	0,32	0,25	0,20
WA-1	10	0,29	0,23	0,16	0,12
WA-4	10	0,17	0,12	0,06	x
WA-5/1	10	0,12	0,08	x	x
WA-14/1	10	0,16	0,11	0,07	x
WR-8B/1/0,35/0	-			ISKRA LED	
WR-8B/1/0,35/5	-			ISKRA LED	
WR-8B/1/0,35/10	-			ISKRA LED	

