



# Aluminium column SAL DL-10

diameter Ø120mm at the base plate

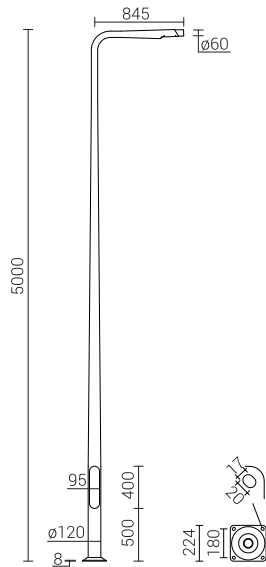

- Anodising:** 10 colours, each with possibility of chemical brightening
- Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)
- Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
- Extension arm type:** According to resistance calculations
- Packing:** sleeve material

Code	Symbol	Height of the kolumn	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42999/C45/C35	AL-10	5m	4mm	23kg	0,3m <sup>3</sup>	B-50 / Z-50	311150 / 311205	4006

SAL DL-10	Dedicated luminaire			
	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
code	42999/C45/C35			
Dedicated luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.l	II zone, II Field category up to	III zone, II Field category up to 755m by s.l
ISKRA LED	OK	OK	OK	OK
ISKRA LED P	OK	OK	OK	OK

