



Aluminium column SAL DS-51

diameter Ø120mm at the base plate

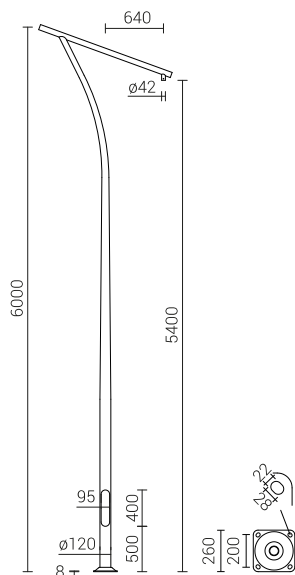

Anodising: 10 colours, each with possibility of chemical brightening

Finish: grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

Luminaire mounting: directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

Extension arm type: According to resistance calculations

Packing: sleeve material

Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42224	SAL DS-51	6m	4mm	24,2kg	0,804m ³	B-51 / Z-51	311151 / 311251	4008

SAL DS-51	Dopuszczalna powierzchnia boczna pojedynczej oprawy [m ²] dla Cx=0,7			
kod 42224	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Dopuszczalna waga pojedynczej oprawy [kg]	I strefa, II kateg. terenu	I i III strefa, II kateg. terenu do 450m n.p.m.	II strefa, II kateg. terenu	III strefa, II kateg. terenu do 755m n.p.m.
10	0,55	0,43	0,24	0,18