

# Aluminium column SAL-N22/5

diameter Ø146mm at the base plate



**Anodising:** 10 colours, each with possibility of chemical brightening

**Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

**Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

**Extension arm type:** According to resistance calculations

**Packing:** sleeve material

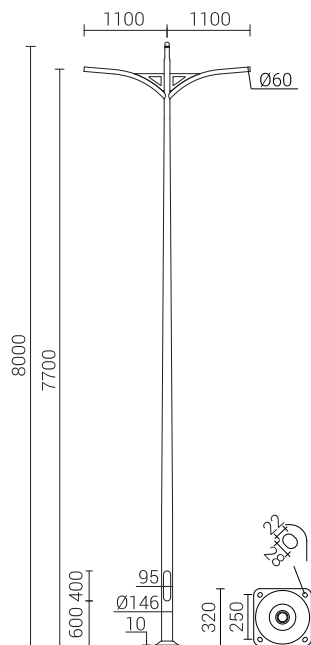

Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
4234811	SAL-N22/5	8m	4,2mm	40,2kg	1,94m <sup>3</sup>	B-60 / Z-60	311160 / 311206	4008

## SAL-N22/5 Acceptable windage of single luminaire [m<sup>2</sup>] for Cx=0,7

code 4234811	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755r by s.I
12	0,12	x	x	x