

# Aluminium column SAL-P12

diameter Ø176mm at the base plate





**Anodising:** 10 colours, each with possibility of chemical brightening

**Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

**Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

**Extension arm type:** According to resistance calculations

**Packing:** sleeve material

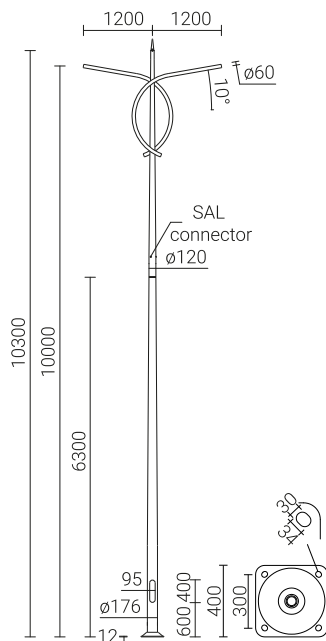

Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42482	SAL-P12	10,3m	4,3mm	64,3kg	1,42m <sup>3</sup>	B-71 / Z-71	311170 / 311207	4012

SAL-P12 Acceptable windage of single luminaire [m<sup>2</sup>] for Cx=0,7

code 42482	Vref. = 22 m-s	Vref. = 24 m-s	Vref. = 26 m-s	Vref. = 28 m-s
Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I
15	0,11	x	x	x