
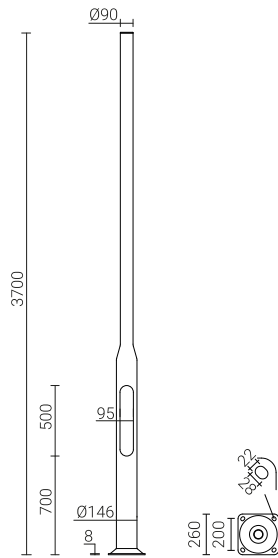


Aluminium column SAL SYG 3,7-B146

diameter Ø146mm at the base plate

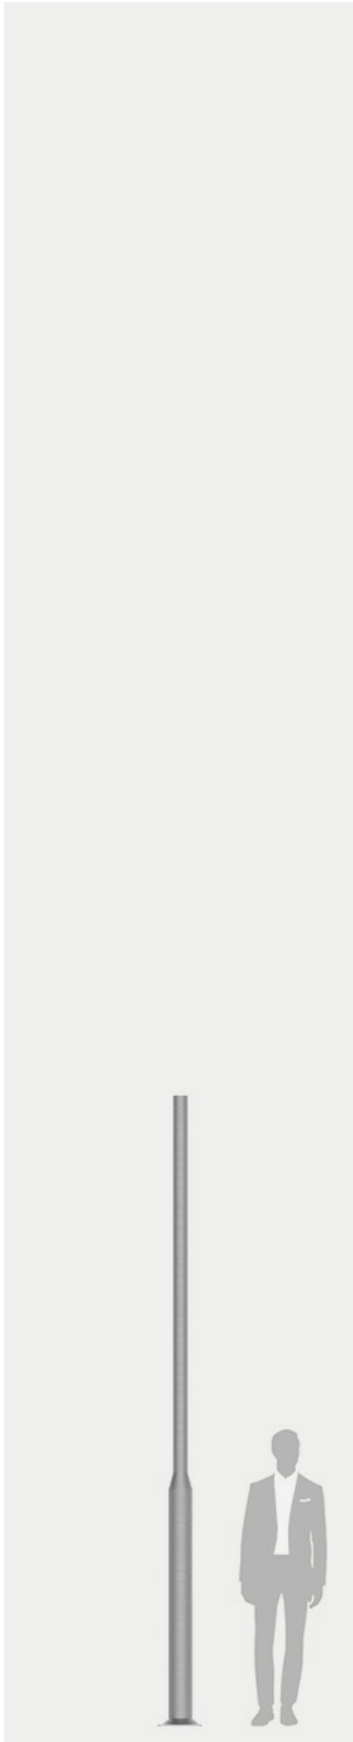

Anodising: 10 colours, each with possibility of chemical brightening
Finish: grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

Luminaire mounting: directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

Extension arm type: According to resistance calculations

Packing: sleeve material



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42822	SAL SYG 3,7-B146	3,7m	4,2mm	16,5kg	0,122m ³	B-51 / Z-51	311151 / 311251	4008

SAL SYG 3,7-B146	Acceptable windage of traffic signal lights and signs [m2] for Cx=1,2			
code 42822	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Acceptable mass of single traffic signal light [kg]	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.I	II zone, II Field category up to	III zone, II Field category up to 755m by s.I
30	0,77	0,66	0,54	0,47