



Aluminium column SAL-4

diameter Ø120mm at the base plate

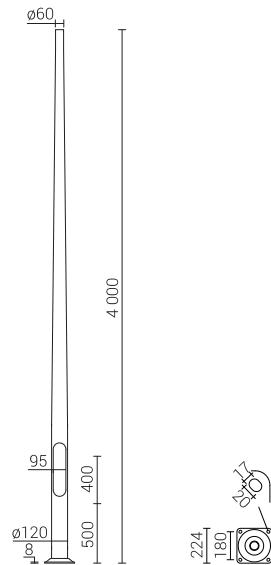

- Anodising:** 10 colours, each with possibility of chemical brightening
- Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)
- Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
- Extension arm type:** According to resistance calculations
- Packing:** sleeve material



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42201	SAL-4	4m	4mm	13,9kg	0,09m ³	B-50 / Z-50	311150 / 311205	4006

SAL-4

Acceptable windage of single luminaire [m²] for Cx=1

Code 42201	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
Type of extension arm	Permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.I	II zone, II Field category	III zone, II Field category up to 755m by s.I
-	20	0,76	0,65	0,53	0,45
WA-1	10	0,63	0,53	0,42	0,35
WA-4	10	0,48	0,39	0,29	0,23
WA-5/1	10	0,28	0,23	0,17	0,14
WA-5/2	8	0,17	0,13	0,09	0,06
WA-14/1	10	0,36	0,29	0,22	0,18
WA-14/2	8	0,25	0,19	0,13	0,09
WA-20/1	10	0,19	0,15	0,10	0,07
WR-4/1/0,6/15	15	0,29	0,24	0,19	0,16
WR-4/2/0,6/15	8	0,30	0,25	0,19	0,16
WR-4/1/0,5/5	15	0,32	0,27	0,22	0,18
WR-4/2/0,5/5	8	0,32	0,27	0,21	0,17
WR-4/1/0,6/15 ZP	15	0,29	0,24	0,19	0,16
WR-4/2/0,6/15 ZP	8	0,30	0,25	0,19	0,16

Aluminium column SAL-4

diameter Ø120mm at the base plate

SAL-4		Acceptable windage of single luminaire [m] for Cx=1			
Code 42201		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Type of extension arm	Permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.I	II zone, II Field category	III zone, II Field category up to 755m by s.I
WR-4/1/0,5/5 ZP	15	0,32	0,27	0,22	0,18
WR-4/2/0,5/5 ZP	8	0,32	0,27	0,21	0,17
WR-8B/1/0,35/0	12	0,32	0,27	0,21	0,18
WR-8B/1/0,35/5	12	0,32	0,27	0,21	0,18
WR-8B/1/0,35/10	12	0,32	0,27	0,21	0,18
WR-10/1/0,85/0	-	ISKRA LED			
WR-10/2/0,85/0	-	ISKRA LED			
WN-1	15	0,71	0,60	0,48	0,41
WN-2	8	0,35	0,30	0,24	0,20